



| POS. | DESCRIPTION | Q.TY |
|------|--|----------|
| 001 | CUNEO / WEDGE / DRUCKKEIL | 2 |
| 003 | CORPO CAMMA / CAM BODY / GRUNDGEHÄUSE | 1 |
| 004 | STAFFA DI AGGANCIO / BRACKET ATTACHMENTS / BRACKETBEFESTIGUNG | 2 |
| 005 | PIASTRINA / PLATE / PLATTE | 2 |
| 006 | DISTANZIALE / SPACER / ABSTANDSHALTER | 2 |
| 007 | STAFFA / BRACKET / BRACKET | 2 |
| 008 | SLITTA / SLIDER / LAGERKEIL | 1 |
| 009 | FINECORSO / LIMIT SWITCHES / ENDSCHALTER | 2 |
| 010 | PIASTRA DI SCORRIMENTO / WEAR PLATE / DRUCKPLATTE | 2 |
| 011 | CILINDRO AD AZOTO / NITROGEN CYLINDER / STICKSTOFFZYLINDER | 2 |
| 012 | PUNTALINO / BUMP STOP / STOSSDÄMPFERSPITZE | 4 |
| 013 | SENSORE DI SICUREZZA / SECURITY SENSOR / SENSOR FÜR SICHERHEIT | 1*OPTION |

| POS. | DESCRIPTION | Q.TY |
|------|---|------|
| 014 | PIASTRA DI SCORRIMENTO / WEAR PLATE / DRUCKPLATTE | 2 |
| 015 | CUNEO / WEDGE / DRUCKSTÜCK | 2 |
| 016 | PIASTRA DI SCORRIMENTO / WEAR PLATE / DRUCKPLATTE | 2 |
| 017 | PIASTRA DI SCORRIMENTO / WEAR PLATE / DRUCKPLATTE | 4 |
| 018 | CHIAVETTA / KEY / SCHLÜSSEL | 3 |
| 019 | PIASTRA DI SCORRIMENTO / WEAR PLATE / DRUCKPLATTE | 4 |
| 020 | PIASTRA DI SCORRIMENTO / WEAR PLATE / DRUCKPLATTE | 4 |
| 021 | PIASTRA DI SCORRIMENTO / WEAR PLATE / DRUCKPLATTE | 2 |
| 022 | FINECORSO / LIMIT SWITCHES / ENDSCHALTER | 1 |
| 023 | CHIAVETTA / KEY / SCHLÜSSEL | 2 |
| 024 | DISTANZIALE / SPACER / ABSTANDSHALTER | 2 |
| 025 | CUNEO / WEDGE / DRUCKKEIL | 2 |

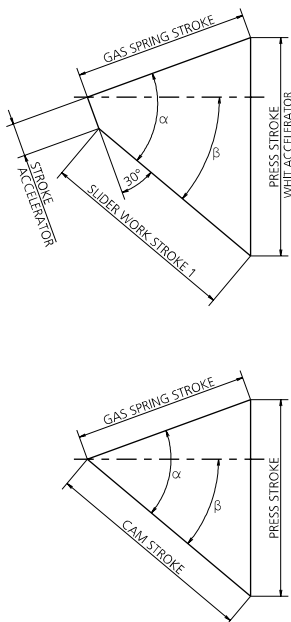

| β | α | SLIDER WORK STROKE 1 | SLIDER WORK STROKE 2 | PRESS STROKE | PRESS STROKE WITH ACCELERATOR | STROKE ACCELERATOR | GAS SPRING STROKE | CAM STROKE | EXTRACTION FORCE (daN) | CUTTING FORCE (daN) |
|---------|----------|----------------------|----------------------|--------------|-------------------------------|--------------------|-------------------|------------|------------------------|---------------------|
| 0° | 50° | 37.28 | 25 | 44.43 | 51.52 | 14.18 | 58 | 37.28 | 9810 | 120200 |
| 5° | 50° | 41.17 | 25 | 44.6 | 54.47 | 19.66 | 58 | 41.17 | 9810 | 120200 |
| 10° | 55° | 41.64 | 25 | 48.24 | 59.11 | 21.4 | 58 | 41.64 | 9850 | 120200 |
| 15° | 55° | 46 | 35 | 49.19 | 56.96 | 15.02 | 58 | 46 | 9850 | 120200 |
| 20° | 55° | 50.56 | 35 | 50.56 | 62.66 | 22.75 | 58 | 50.56 | 9850 | 120200 |
| 25° | 60° | 52.42 | 35 | 55.42 | 70.61 | 27.53 | 58 | 52.42 | 9820 | 120200 |
| 30° | 60° | 58 | 35 | 58 | 81 | 39.84 | 58 | 58 | 9820 | 120200 |
| 35° | 65° | 61.32 | 40 | 64.17 | 89.39 | 41.32 | 58 | 61.32 | 9710 | 120200 |
| 40° | 65° | 68.62 | 50 | 68.62 | 95.84 | 41.7 | 58 | 68.62 | 9710 | 120200 |
| 45° | 70° | 74.34 | 55 | 77.08 | 114.44 | 52.84 | 58 | 74.34 | 9520 | 120200 |
| 50° | 70° | 84.79 | 77 | 84.79 | 107.22 | 28.84 | 58 | 84.79 | 9520 | 120200 |
| 55° | 75° | 95.02 | / | 97.67 | / | / | 58 | 95.02 | 9260 | 120200 |
| 60° | 75° | 112.05 | / | 112.05 | / | / | 58 | 112.05 | 9260 | 120200 |
| 65° | 80° | 102.85 | / | 104.86 | / | / | 45 | 102.85 | 8880 | 120200 |
| 70° | 85° | 127.09 | / | 131.07 | / | / | 45 | 127.09 | 8490 | 120200 |
| 75° | 85° | 114.15 | / | 115.47 | / | / | 30 | 114.15 | 8420 | 120200 |

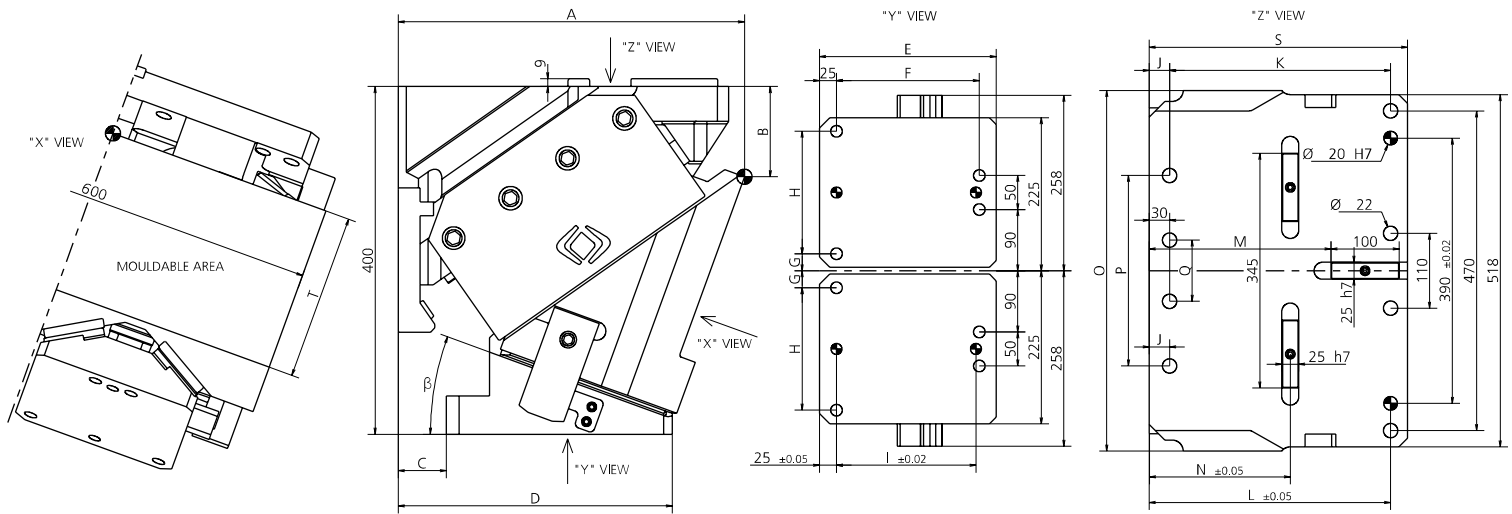

| CODE | β | A | B | C | D | E | F | G | H | I | J | K | L | M | N | O | P | Q | R | S | T |
|--------------|---------|--------|--------|-----|-----|-----|-----|----|-----|-----|----|-----|-----|-------|-------|-----|-----|-----|-----|-----|-----|
| 0150.0600-00 | 0° | 368 | 75 | 120 | 375 | 255 | 205 | 25 | 180 | 200 | 30 | 330 | 360 | 272.5 | 167.5 | 600 | 560 | 250 | 330 | 385 | 200 |
| 0150.0600-05 | 5° | 377.63 | 89.37 | 105 | 363 | 258 | 210 | 25 | 180 | 205 | 30 | 330 | 360 | 272.5 | 182.5 | 600 | 560 | 250 | 330 | 385 | 200 |
| 0150.0600-10 | 10° | 387.28 | 99.59 | 105 | 350 | 245 | 205 | 25 | 180 | 200 | 30 | 330 | 360 | 272.5 | 192.5 | 600 | 560 | 250 | 330 | 385 | 200 |
| 0150.0600-15 | 15° | 396.88 | 110.64 | 95 | 340 | 245 | 195 | 25 | 180 | 190 | 30 | 330 | 360 | 272.5 | 207.5 | 600 | 560 | 250 | 330 | 385 | 200 |
| 0150.0600-20 | 20° | 391.35 | 122.53 | 55 | 315 | 260 | 210 | 25 | 180 | 205 | 30 | 325 | 355 | 267.5 | 207.5 | 530 | 280 | 90 | 325 | 380 | 200 |
| 0150.0600-25 | 25° | 400.61 | 135.23 | 55 | 305 | 250 | 200 | 25 | 180 | 195 | 30 | 325 | 355 | 267.5 | 222.5 | 530 | 280 | 90 | 325 | 380 | 200 |
| 0150.0600-30 | 30° | 409.61 | 138.74 | 45 | 295 | 250 | 200 | 25 | 180 | 195 | 30 | 345 | 375 | 287.5 | 222.5 | 530 | 280 | 90 | 345 | 400 | 200 |
| 0150.0600-35 | 35° | 418.26 | 153.01 | 5 | 285 | 280 | 230 | 25 | 180 | 225 | 30 | 355 | 385 | 302.5 | 202.5 | 530 | 280 | 90 | 355 | 415 | 200 |
| 0150.0600-40 | 40° | 426.51 | 168.02 | 5 | 280 | 275 | 225 | 25 | 180 | 220 | 30 | 380 | 410 | 322.5 | 217.5 | 530 | 280 | 90 | 380 | 435 | 200 |
| 0150.0600-45 | 45° | 434.3 | 183.73 | 5 | 270 | 265 | 215 | 25 | 180 | 210 | 30 | 380 | 410 | 322.5 | 242.5 | 530 | 280 | 90 | 380 | 435 | 200 |
| 0150.0600-50 | 50° | 419.53 | 180.82 | -5 | 220 | 225 | 175 | 25 | 180 | 170 | 30 | 400 | 430 | 342.5 | 232.5 | 530 | 280 | 100 | 400 | 455 | 200 |
| 0150.0600-55 | 55° | 427.8 | 199.87 | -5 | 210 | 215 | 165 | 25 | 180 | 160 | 30 | 400 | 430 | 342.5 | 247.5 | 530 | 280 | 100 | 400 | 455 | 200 |
| 0150.0600-60 | 60° | 425.24 | 224.61 | -15 | 200 | 215 | 165 | 25 | 180 | 160 | 30 | 400 | 430 | 342.5 | 267.5 | 530 | 280 | 100 | 400 | 455 | 200 |
| 0150.0600-65 | 65° | 431.81 | 244.96 | 5 | 190 | 185 | 140 | 35 | 160 | 130 | 55 | 415 | 470 | 382.5 | 262.5 | 600 | 560 | 250 | 440 | 495 | 200 |
| 0150.0600-70 | 70° | 437.45 | 270.84 | 5 | 185 | 180 | 135 | 35 | 160 | 125 | 55 | 415 | 470 | 382.5 | 262.5 | 600 | 560 | 250 | 440 | 495 | 200 |
| 0150.0600-75 | 75° | 442.12 | 292.17 | 5 | 180 | 175 | 120 | 35 | 160 | 130 | 55 | 415 | 470 | 382.5 | 327.5 | 600 | 560 | 250 | 440 | 495 | 200 |

13 PATENT PENDING

13 (9003) SENSORE / SENSOR / SENSOR



MODELLO D'ORDINE / ORDER EXAMPLE / BESTELLBEISPIEL / MODÈLE DE COMMANDE

MODEL **0150.0600** INCLINATION **-10°** OPTION CODE **9003.0001**