



POS.	DESCRIPTION	Q.TY
001	CUNEO / WEDGE / DRUCKKEIL	1
002	SLITTA / SLIDER / LAGERKEIL	1
003	CORPO CAMMA / CAM BODY / GRUNDGEHÄUSE	1
004	STAFFA DI AGGANCIO / BRACKET ATTACHMENTS / BRACKETBEFESTIGUNG	2
005	FINECORSO / LIMIT SWITCHES / ENDSCHALTER	1
006	STAFFA / BRACKET / BRACKET	2
007	CHIAVETTA / KEY / SCHLÜSSEL	3
008	CHIAVETTA / KEY / SCHLÜSSEL	1

POS.	DESCRIPTION	Q.TY
009	PIASTRA DI SCORRIMENTO / WEAR PLATE / DRUCKPLATTE	1
010	CILINDRO AD AZOTO / NITROGEN CYLINDER / STICKSTOFFZYLINDER	1
011	PUNTALINO / BUMP STOP / STOSSDÄMPERSPITZE	1
012	SENSORE DI SICUREZZA / SECURITY SENSOR / SENSOR FÜR SICHERHEIT	1*OPTION
013	FINECORSO / LIMIT SWITCHES / ENDSCHALTER	1
014	FINECORSO / LIMIT SWITCHES / ENDSCHALTER	1
015	PIASTRA DI SCORRIMENTO / WEAR PLATE / DRUCKPLATTE	1
026	DISTANZIALE / SPACER / ABSTANDSHALTER	1



β	α	PRESS STROKE	GAS SPRING STROKE	CAM STROKE	EXTRACTION FORCE (daN)	CUTTING FORCE (daN)
0°	50°	34.5	45	28.9	670	16200
5°	50°	34.6	45	31.9	670	16200
10°	50°	35	45	35	670	16200
15°	50°	35.7	45	38.2	670	16200
20°	50°	36.7	45	41.5	670	16200
25°	50°	38	45	45	670	16200
30°	50°	39.8	45	48.8	670	16200
35°	50°	42.1	45	53.1	670	16200
40°	50°	45	45	57.9	670	16200
45°	50°	47.7	44	62	660	16200
50°	50°	47.7	40	62.2	640	16200
55°	55°	48.6	34	59.3	720	16200
60°	60°	52	30	60	760	16200
65°	65°	53.6	25	59.2	810	16200
70°	70°	55	20	58.5	980	16200
75°	75°	56	15	58	1140	16200

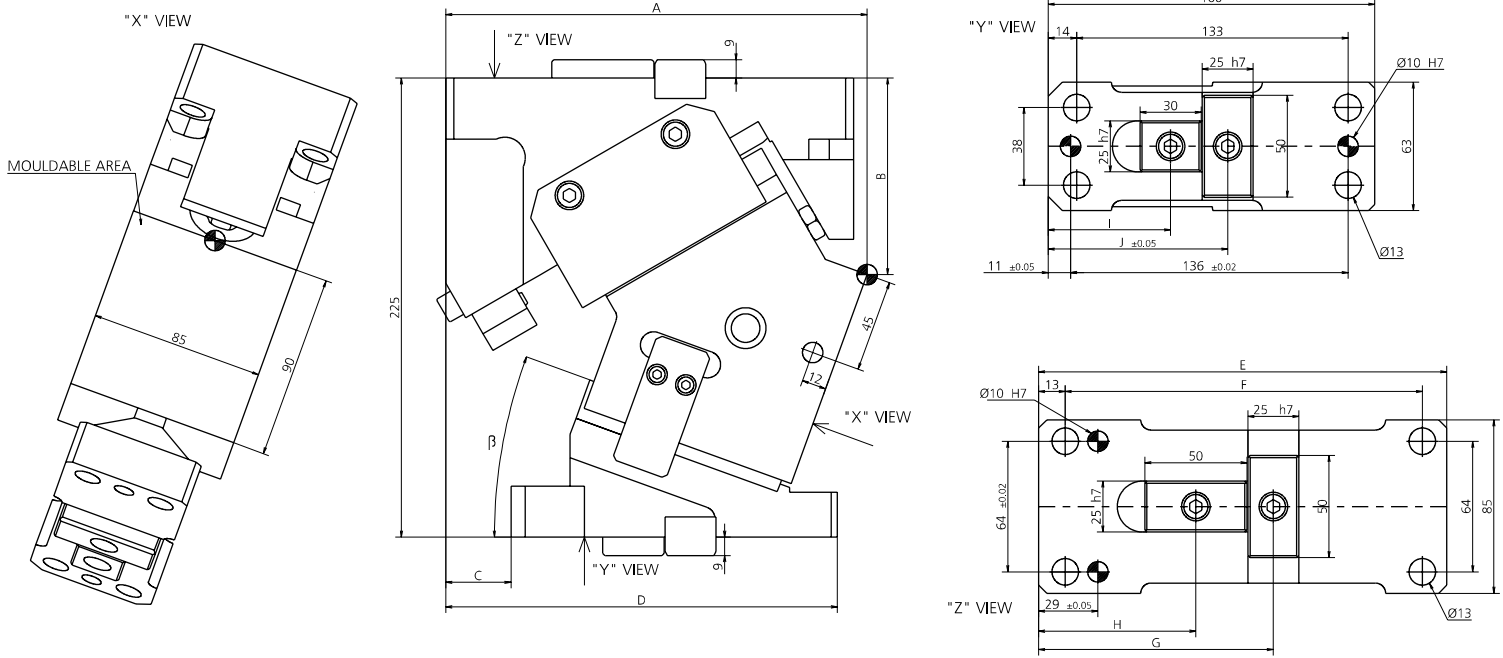

CODE	β	A	B	C	D	E	F	G	H	I	J
0154.08**-00	0°	206	76	66	140	185	160	115	77	68	96
0154.08**-05	5°	207.48	81.82	59	148.48	190	165	115	77	66	94
0154.08**-10	10°	208.72	86.49	51	157.72	195	170	115	77	65	93
0154.08**-15	15°	206.73	91	40	166.73	195	170	115	77	63	91
0154.08**-20	20°	206.54	96.32	32	174.54	200	175	115	77	60	88
0154.08**-25	25°	205.15	100.45	22	183.15	200	175	115	77	60	88
0154.08**-30	30°	203.58	105.36	13	190.58	205	180	115	77	60	88
0154.08**-35	35°	200.85	110.03	2	198.85	205	180	115	77	60	88
0154.08**-40	40°	195.99	115.47	-10	205.99	205	180	115	77	60	88
0154.08**-45	45°	188.02	121.65	-24	212.02	205	180	118	80	60	88
0154.08**-50	50°	175.96	126.56	-41	216.96	200	175	118	80	60	88
0154.08**-55	55°	173.97	128.85	-50	223.97	200	175	118	80	60	88
0154.08**-60	60°	171.14	130.18	-59	230.14	200	175	118	80	60	88
0154.08**-65	65°	168.98	133.11	-69	237.98	200	175	118	80	60	88
0154.08**-70	70°	165.99	135	-80	245.99	200	175	118	80	60	88
0154.08**-75	75°	162.93	137.64	-91	253.93	200	175	118	80	60	88

CAM COD.	GAS SPRING	KEYS	ANGLE
	1=STANDARD GAS SPRING	1=KEYS MOUNTED	
0154.08	2= GAS SPRING NOT FILLED	2= KEYS ONLY ADDED, NOT MOUNTED	-00= ANGLE (FROM 0° TO 75°)
	3= WITHOUT GAS SPRING	3= WITHOUT KEYS	

12 PATENT PENDING

12 (9003) SENSORE / SENSOR / SENSOR



ESEMPIO / EXAMPLES/ BEISPIELE / EXEMPLES

0154.0811-20 = CAM UNIT 0154.08, STANDARD GAS SPRING (1), KEYS MOUNTED (1), ANGLE 20°

0154.0832-50 = CAM UNIT 0154.08, WITHOUT GAS SPRING (3), KEYS ONLY ADDED, NOT MOUNTED (2), ANGLE 50°