



POS.	DESCRIPTION	Q.TY
001	CUNEO / WEDGE / DRUCKKEIL	1
002	SLITTA / SLIDER / LAGERKEIL	1
003	CORPO CAMMA / CAM BODY / GRUNDGEHÄUSE	1
004	STAFFA DI AGGANCIO / BRACKET ATTACHMENTS / BRACKETBEFESTIGUNG	2
005	PIASTRINA / PLATE / PLATTE	1
006	STAFFA / BRACKET / BRACKET	1
007	STAFFA / BRACKET / BRACKET	1
008	CHIAVETTA / KEY / SCHLÜSSEL	4
009	CHIAVETTA / KEY / SCHLÜSSEL	1
010	CHIAVETTA / KEY / SCHLÜSSEL	1
011	PIASTRA DI SCORRIMENTO / WEAR PLATE / DRUCKPLATTE	1

POS.	DESCRIPTION	Q.TY
012	CILINDRO AD AZOTO / NITROGEN CYLINDER / STICKSTOFFZYLINDER	1
013	PUNTALINO / BUMP STOP / STOSSDÄMPFERSPITZE	2
014	SENSORE DI SICUREZZA / SECURITY SENSOR / SENSOR FÜR SICHERHEIT	1*OPTION
015	FINECORSO / LIMIT SWITCHES / ENDSCHALTER	1
016	FINECORSO / LIMIT SWITCHES / ENDSCHALTER	1
017	PIASTRA DI SCORRIMENTO / WEAR PLATE / DRUCKPLATTE	1
018	PIASTRA DI SCORRIMENTO / WEAR PLATE / DRUCKPLATTE	1
019	PIASTRA DI SCORRIMENTO / WEAR PLATE / DRUCKPLATTE	1
020	PIASTRA DI SCORRIMENTO / WEAR PLATE / DRUCKPLATTE	1
021	DISTANZIALE / SPACER / ABSTANDSHALTER	1



$\beta$	$\alpha$	PRESS STROKE	GAS SPRING STROKE	CAM STROKE	EXTRACTION FORCE (daN)	CUTTING FORCE (daN)
0°	50°	36.8	48	30.9	940	32300
5°	50°	36.9	48	34.1	940	32300
10°	50°	37.3	48	37.3	940	32300
15°	50°	38.1	48	40.7	940	32300
20°	50°	39.1	48	44.2	940	32300
25°	50°	40.6	48	48	940	32300
30°	50°	42.5	48	52.1	930	32300
35°	50°	44.9	48	56.6	930	32300
40°	50°	48	48	61.7	930	32300
45°	50°	52	48	67.6	930	32300
50°	50°	57.2	48	74.7	930	32300
55°	55°	61.4	43	75	970	32300
60°	60°	64.1	37	74	1120	32300
65°	65°	66.5	31	73.4	1260	32300
70°	70°	68.7	25	73.1	1360	32300
75°	75°	70.9	19	73.4	1630	32300

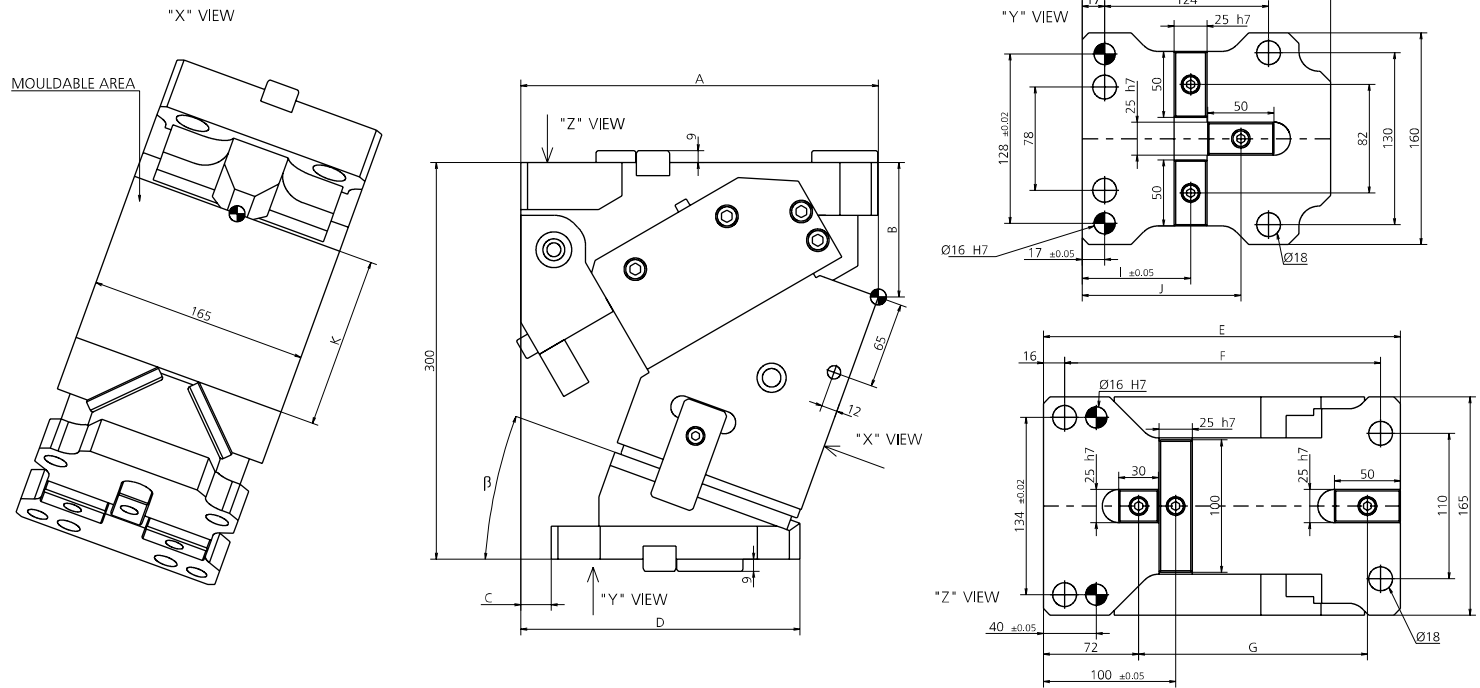

CODE	$\beta$	A	B	C	D	E	F	G	H	I	J	K
0154.16**-00	0°	261	74	77	184	250	219	153	188	82	120	129.5
0154.16**-05	5°	264.19	78.59	64	200.19	255	224	158	188	82	120	129.5
0154.16**-10	10°	266.98	86.1	51	215.98	260	229	163	188	82	120	129.5
0154.16**-15	15°	268.38	94.48	37	231.38	265	234	168	188	82	120	129.5
0154.16**-20	20°	270.41	101.7	23	247.41	270	239	173	188	82	120	129.5
0154.16**-25	25°	270.08	109.74	11	259.08	275	244	178	188	82	120	129.5
0154.16**-30	30°	267.4	118.56	-7	274.4	275	244	178	188	82	120	129.5
0154.16**-35	35°	266.4	128.13	-20	286.4	280	249	183	188	82	120	129.5
0154.16**-40	40°	267.1	140.43	-35	302.1	285	254	188	188	82	120	129.5
0154.16**-45	45°	260.53	153.43	-51	311.53	285	254	188	188	82	120	129.5
0154.16**-50	50°	251.71	165.1	-67	318.71	280	249	183	183	82	120	129.5
0154.16**-55	55°	246.27	167.18	-80	326.27	280	249	183	180	70	108	133
0154.16**-60	60°	239.61	172.77	-92	331.61	280	249	183	175	70	108	133
0154.16**-65	65°	235.85	126.41	-108	343.85	280	249	183	175	70	108	133
0154.16**-70	70°	236.6	122.16	-111	347.6	280	249	183	170	70	108	133
0154.16**-75	75°	232.35	114.18	-117	349.35	280	249	183	161	70	108	133

CAM COD.	GAS SPRING	KEYS	ANGLE
	1=STANDARD GAS SPRING	1=KEYS MOUNTED	
0154.16	2= GAS SPRING NOT FILLED	2= KEYS ONLY ADDED, NOT MOUNTED	-00= ANGLE (FROM 0° TO 75°)
	3= WITHOUT GAS SPRING	3= WITHOUT KEYS	

**14 PATENT PENDING**

14 (9003) SENSORE / SENSOR / SENSOR



ESEMPIO / EXAMPLES/ BEISPIELE / EXEMPLES

**0154.1611-20** = CAM UNIT **0154.16**, STANDARD GAS SPRING (1), KEYS MOUNTED (1), ANGLE **20°**

**0154.1632-50** = CAM UNIT **0154.16**, WITHOUT GAS SPRING (3), KEYS ONLY ADDED, NOT MOUNTED (2), ANGLE **50°**